



Falcon Series

Frequency Converter Module

Ka-Band Block Upconverter

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

Converting L-band to Ka-band. The 1U chassis has the capacity for up to five hot-swap frequency converter modules. These can be all upconverters, all downconverters or a mix of both.

Resilience from dual redundant hot-swap power supplies & field replaceable CPU & HMI

Local control & monitoring via HMI high resolution touchscreen

Compact housed in a 1U high chassis with capacity for up to five modules

Flexible Module Configurations choose from a mixture of up and down converters with different operating frequencies.

Hot Swap & replaceable RF Frequency Converter modules

Redundancy configurations Field-replaceable 2+1 or 1+1 redundant configuration

Field replaceable Internal 10MHz reference source and external reference inject port with auto detection


Secure protocols with SNMPv3 and HTTPS

Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface

Chassis - Specification

Dimensions / Weight / Colour	1U high x 550mm deep x 19" wide / <10 kg / RAL9003—White (Semi-matte)
Capacity	Total of 17 module slots. Note that 1 slot will be used for fan (if required) and 1 slot will be used for 10 MHz EXT inject module.
Temperature	Operating: 0 to 45°C / Storage: -20°C to +75°C
Location / Humidity / Altitude	Indoor use only / 20 to 90% non-condensing / 10,000 feet AMSL (Operational) 30,000 feet AMSL (Storage) Above Mean Sea Level
Control & Monitoring	Local: HMI touch screen Remote: Ethernet via RJ45, 10BaseT/100 BaseTx. TCP/IP, SNMP V3 & HTTPS & Web browser interface HMI and CPU field replaceable.
MTTR	20 minutes (15 minutes to retrieve spare part and 5 mins to replace) Applies to LRUs only and assumed in house stock
AC Input / Consumption	85-264Vac 50/60Hz / 150W
PSU Redundancy	Dual redundant and alarmed Diode OR. Hot swappable
Input & Output ports	Dependant upon module fitted
No. of modules per chassis	5 Max. Module 3 slots wide



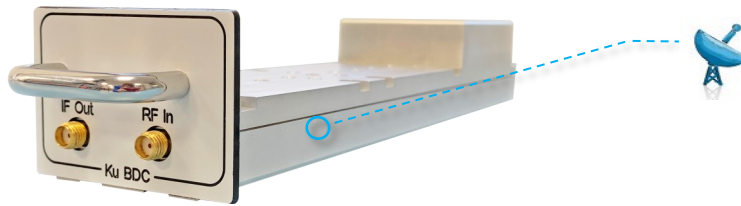

Frequency Converter Module
Compact form factor allowing multiple modules to be housed in 1U chassis.
Each module uses 3 slots in the chassis.

Frequency Upconverter Module - RF Parameters		Redundancy Module - RF Parameters	
Model Numbers	FN-U-KXL1-24143-XXK5	SWF-G1S-QX-108	SWF-G1S-QX-106
Size	3 Slots wide	4 slots wide	6 slots wide
Redundancy	Standalone module	1+1 (Note: This column denotes specs for 24143 in 1+1 configuration)	2+1 (Note: This column denotes specs for 24143 in 2+1 configuration)
Input Frequency Range	950—1950 MHz		
Output Frequency Range	20 000 – 21 000 MHz		
Fixed LO	19 050 MHz		
Conversion Gain	Max 30 ± 2 dB / Min 0 ± 2 dB	Max 25 ± 2 dB / Min -5 ± 2 dB	Max 24 ± 2 dB / Min -6 ± 2 dB
Gain Steps	0.25 ± 0.15 dB		
Gain Flatness (50 Ohm)	Full Band: ±1.5 dB		
Input Return Loss (RF-Band, 50 Ohm)	Typ -18 dB / Min.-14 dB	Typ. -15dB / Min. -12dB	Typ. -15dB / Min. -12dB
Output Return Loss (X-Band, 50 Ohm)	Typ. -14 dB / Min.-10 dB	Typ. -11dB / Min. -7dB	Typ. -11dB / Min. -8dB
Noise Figure	Typ. 8 dB / Max. 10 dB (At max gain)	Typ. 10.0dB / Max. 12.4dB	Typ. 10.5dB / Max. 13.0dB
Maximum Operational Input Level	-35 dBm (At max gain)		
OP1dB	Typ. +3 dBm / Min. 0 dBm (At max gain)	Typ. -0.5dBm / Min. -3.5dBm	Typ. -1.0dBm / Min. -4.0dBm
OIP3	Typ. +13 dBm / Min.+10 dBm (At max gain)	Typ. +10dBm / Min. +7dBm	Typ. +9.5dBm / Min. +6.5dBm
Group Delay (max pk-pk)	2 ns		
Internal Reference Stability	±5x10 ⁻⁸ over 0 to 50°C		
Phase Noise (Typical values)	@10Hz offset	-65 dBc / Hz	
	@100Hz offset	-75 dBc / Hz	
	@1KHz offset	-80 dBc / Hz	
	@10KHz offset	-85 dBc / Hz	
	@100KHz offset	-90 dBc / Hz	
	@1MHz offset	-110 dBc / Hz	
Spurs In-band	Carrier related	<-60 dBc	
	Non-carrier related	<-70 dBm	
Spurs Out-of-band	Carrier related	<-60 dBc	
	Non-carrier related	<-70 dBm	
LO Breakthrough	<-60 dBm (TBC)		
Image Rejection	> 60 dB typ		
External Reference	Input Freq. 10 MHz. Auto detection. 1 required per chassis		
External Ref. Input Level	+3 dBm ± 3dB		
Mute	60 dB		
Number of conversion stages	Single		
Spectral Inversion	Non-inverting		
Spec version	0.1	0.2	0.2

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.
 Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

