



# StingRay RF over Fibre

DWDM (Dense Wavelength Division Multiplexing),  
40 wavelengths, up to 500 km distance,  
200 series **Broadband modules** with  
13/18V LNB powering (on TX module)


### Typical applications:

- Ku-band and Ka-band ready for HTS applications
- Long distance distribution of comms traffic across site with minimal loss - up to 500 km distances
- General satcoms– teleports, video head-ends, TVRO
- Compact solution for small quantity links such as tactical HQ


The StingRay DWDM 200 Series of Broadband RF over fibre units are designed to provide compact fibre links, with forty wavelengths on a single fibre cable, and transmission distance of up to 500 km with optical amplifiers. The transmit modules benefit from a high and wide dynamic range with automatic link optimisation ensuring high quality Broadband transmission.

The StingRay DWDM system comprises of transmit modules and a multiplexer module to combine up to 40 wavelengths on to a single fibre cable at the transmit end. A demultiplexer module and receive modules are then used at the receive end to split the separate wavelengths.

For more wavelengths and longer distances, please contact us.

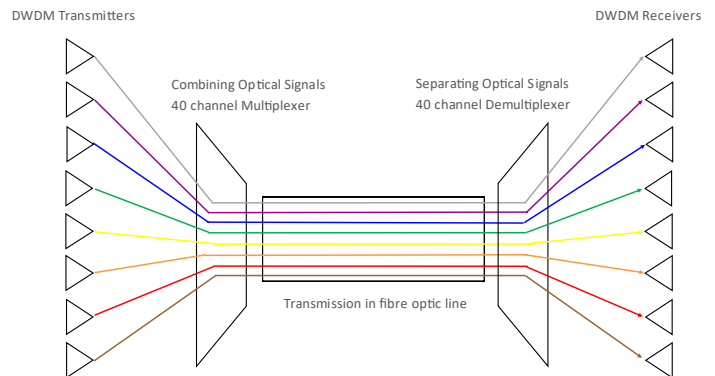

## Fibre Modules



**50 - 2450 MHz**  
operating frequency range



**Up to 40 wavelengths** on  
a single fibre cable



**Up to 500 km transmission distance** with transmit, receive and optical amplifier module options



**LNB Powering** 13/18V on TX modules only



**High isolation** between modules for signal quality

## Chassis Options



**Compact indoor & outdoor** chassis options, which can be part populated



**Remote control & monitoring** via RJ45 Ethernet port with SNMP & web browser interface



**Local control & monitoring** via front panel push buttons & display



**Resilience** from dual redundant hot-swap power supplies, hot-swap fibre modules & fans



**10MHz Inject** from an external source chassis option



Indoor chassis showing hot-swap power supply modules, fibre modules and fans



Outdoor Unit (ODU)





**RF Parameters (TX & RX Modules)**

Model Number		SRY-Txx-B2-253 DWDM L-band Transmit Fibre Module		SRY-RX-B2-254 DWDM L-band Receive Fibre Module			
Frequency Range		50 to 2450 MHz (Broadband)					
Flatness	850-2150MHz	± 1 dB		± 1.0 dB		Full TX & RX link with 20km fibre link using SRY-TxxB2-253. Fixed gain mode	
	50-2450MHz	± 1.5 dB		± 1.5 dB			
	Any 36MHz	± 0.25 dB for i/p		± 0.25 dB			
Output AGC Flatness		-		± 2.5 dB over full band		Input -10 to -40 dBm	
AGC/MSG		AGC: Factory set (once AGC level set, gain can be fixed)		AGC/MSG: Settable output power level (once AGC level set, gain can be fixed)			
Return Loss	Typical	18 dB 50Ω SMA	16 dB 50Ω BNC	18 dB 50Ω SMA	18 dB 50Ω BNC	16 dB 75Ω BNC	16 dB 75Ω F-type
	Minimum	12 dB 50Ω SMA	11 dB 50Ω BNC	12 dB 50Ω SMA	12 dB 50Ω BNC	12 dB 75Ω BNC	12 dB 75Ω F-type
Monitor Port		-20 dB ± 3 dB Mounted on module					
OIP3		17 dBm typical, 14 dBm worst case					
		(Test condition: SRY-RX-B2-254, 1m fibre, 10dB gain, -22 dBm tones at 2150 and 2152 MHz)		(Test condition: SRY-TxxB2-253, 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152 MHz)			
CNR (in any 36 MHz)		50 dB typical, 45 dB worst case					
		(Test condition: SRY-RX-B2-254, 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power)		(Test condition: SRY-TxxB2-253, 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power)			
Noise Figure		12 dB typical, 15 dB worst case					
		(Test condition: SRY-RX-B2-254, 1m fibre, -50 dBm RF i/p power, -10 dBm o/p power)		(Test condition: SRY-TxxB2-253, 1m fibre, -50 dBm RF i/p power, -10 dBm o/p power)			
Group Delay Variation		2ns over Full band, 1ns over any 36MHz					
SFDR		112 dB/Hz <sup>2/3</sup> typical, 108 dB/Hz <sup>2/3</sup> minimum					
		(Test condition: SRY-RX-B2-254, 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152 MHz)		(Test condition: SRY-TxxB2-253, 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152 MHz)			
IMD3		-58 dBc typical, -52 dBc minimum		-			
		(Test condition: SRY-RX-B2-254, 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152 MHz)		-			
RF Signal Range		Input: -50 to -10 dBm (total power) Operational i/p range		Output: -30 to -10 dBm (total power) o/p range available under all i/p conditions			
Max RF Input		16 dBm total power (Damage level, NOT operational)		-			
Laser Type		DFB Optical isolator for improved performance		-			
Optical Wavelength		DWDM C-band see centre wavelengths table		1100 to 1650 nm Optimised for 1310nm and 1550 nm			
Optical Power		Output: 8 ± 1 dBm		Input: -8 to +4.5 dBm (Max. 10 dBm)			
Power Consumption		20W typical		4W typical			
LNB Power		18/13V ±5%, Up to 500 mA per channel (short circuit current 750 mA max)		-			
MTBF		TBC		> 250,000 hours			
Connector Options		RF connectors: SMA 50Ω - S5, BNC 50Ω - B5, BNC 75Ω - B7 or F-type 75Ω - F7 Optical Connectors: FA - FC/APC or SA - SC/APC					
Environmental Conditions							
Operating Temperature		-20°C to 50°C		-20°C to 60°C			
Storage Temperature		-40°C to 85°C		-40°C to 90°C			
Humidity		20 to 90 %, non-condensing					

**Centre Wavelengths  
SRY-Txx-B2-253**

ITU Channel	Wavelength / nm	Frequency / THz
C59	1530.33	195.90
C58	1531.12	195.80
C57	1531.90	195.70
C56	1532.68	195.60
C55	1533.47	195.50
C54	1534.25	195.40
C53	1535.04	195.30
C52	1535.82	195.20
C51	1536.61	195.10
C50	1537.40	195.00
C49	1538.19	194.90
C48	1538.98	194.80
C47	1539.77	194.70
C46	1540.56	194.60
C45	1541.35	194.50
C44	1542.14	194.40
C43	1542.94	194.30
C42	1543.73	194.20
C41	1544.53	194.10
C40	1545.32	194.00
C39	1546.12	193.90
C38	1546.92	193.80
C37	1547.72	193.70
C36	1548.51	193.60
C35	1549.32	193.50
C34	1550.12	193.40
C33	1550.92	193.30
C32	1551.72	193.20
C31	1552.52	193.10
C30	1553.33	193.00
C29	1554.13	192.90
C28	1554.94	192.80
C27	1555.75	192.70
C26	1556.55	192.60
C25	1557.36	192.50
C24	1558.17	192.40
C23	1558.98	192.30
C22	1559.79	192.20
C21	1560.61	192.10
C20	1561.42	192.00

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Please see separate datasheet for 200 series chassis options

