



# MFC





Microwave Filter Company, Inc.

Creating Filters and Components to 50 Ghz for Over 50 Years!

This bandpass filter prevents undesired interaction between this X-band transmit band (8.95 - 9.55 GHz) and other sources of communication operating above and below the band. This transmit filter also includes a coupling port to monitor power output.

### Specifications:

Passband:	8.95 - 9.55 GHz
Passband Insertion Loss:	0.5 dB Max
Passband Return Loss:	18 dB Min
Passband Power (CW):	150 Watts Max
Coupled Port:	-30 dB, ± 0.5 dB
Rejection:	75 dB Min @ 8.25 GHz 50 dB Min @ 10.50 GHz
Altitude Rating:	40,000 ft. Max
Connectors:	N-female (Input) RA SMA-female WR90 Cover Flange
Dimensions:	10.83" x 3.00" x 1.63" 275 mm x 76 mm x 41 mm

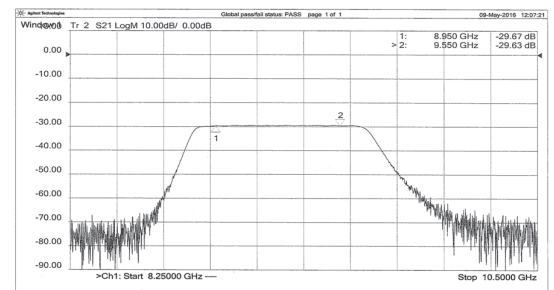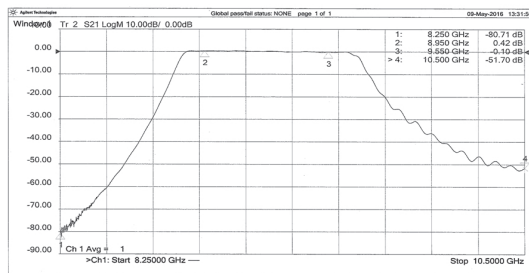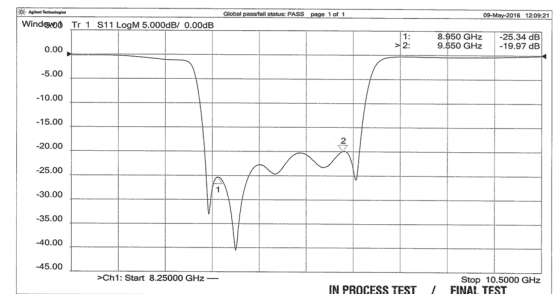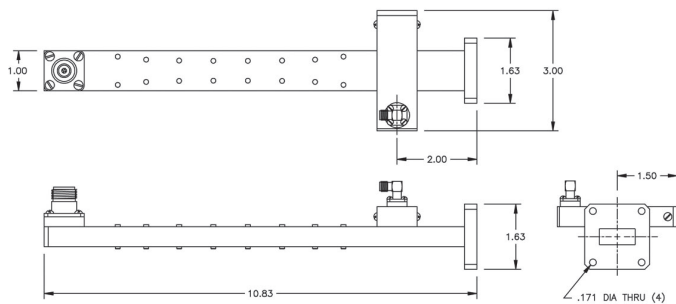

All MFC Products Designed and Manufactured in the USA



E-Mail: [Sales@iktechcorp.com](mailto:Sales@iktechcorp.com)

X-Band Bandpass Filters w/Coupling Port  
Model 19448