

NEXUS-4

6 GHz Bi-Directional RF Attenuator Matrix Switch




NEXUS-4

General Description:

The **NEXUS-4** is a bi-directional fully non-blocking 32x32 RF matrix switching system that can route any input ports to any output ports in a 6 RU chassis. With the frequency range of 400 MHz to 6 GHz and the capability of expanding to 256x256, it enables large scale wireless testing that involves many MIMO base stations and devices. The built-in programmable attenuators and efficient automation interface provide ease-of-use testing of signal fade and emulation of mobility scenarios. It can dramatically increase lab efficiency by eliminating manual patch panel and cabling as it can be remotely reconfigured for different test setups consistently in seconds. The utilization of **NEXUS-4** RF matrices will expand your testing capabilities, improve ROI of lab instruments, and reduce time to market.

Features & Benefits:

- 400 to 6000 MHz frequency range covering all major wireless technologies
- Support 32x32 RF ports in 6 RU with modular design expandable to 32x128
- Solid state switching and attenuation for consistent, repeatable and glitchless performance; reconfigure any test setup in seconds
- Fully non-blocking splitting and combining that supports MIMO testing
- Emulate free space incremental path loss of 0 to 60 dB
- High power handling of up to 30 dBm
- Management software **Q-LAAMP** enables resource and time allocation for high lab efficiency

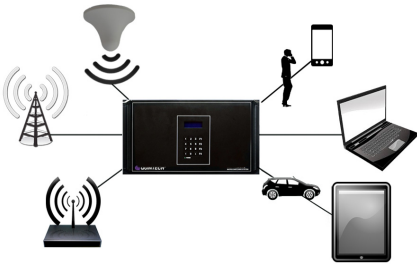

Specifications:*	NEXUS-4		
Operating Frequency:	400-700 MHz	700-4000 MHz	4000-6000 MHz
Configuration:	Up to 32 Port A/32 Port B in a Single 6 RU Chassis		
Matrix Type:	Passive Bi-directional, Fully Non-blocking		
Switching Technology:	Solid State		
Impedance:	50 Ω		
OIP3:	60 dBm Min.		
P1dB:	40 dBm Min.		
Fixed Attenuation:¹	37 dB Typical	45 dB Max.	46 dB Typical
Variable Attenuation (at Each Cross Point):	0 to 60 dB Attenuation in 0.5 dB Steps		
Isolation Port A to Port A:	100 dB Single Connection, 50 dB Multiple Connections		
Isolation Port B to Port B:	80 dB Single Connection, 50 dB Multiple Connections		
Isolation Port A to Port B:	100 dB		
On/ Off Isolation:	70 dB Min.	70 dB Min.	65 dB Min.
Return Loss:	10 dB	14 dB	10 dB
No Damage Signal Level:	+40 dBm Max.		
RF Connectors:	N-type, SMA, QMA, TNC, 4.3-10		
Power Requirements:	100-240 VAC Autoranging, 50/60 Hz		
Power Consumption:	63 W		
Local Control:	Front Panel Keypad with LCD Display		
Remote Control:	Ethernet, TELNET, SNMP, or TCP/IP Via Customer Supplied Control System, XR Bus for Expansion		
Software:	Embedded Web Server and API Protocol, Fast Ethernet Option, Q-LAAMP Option		
Mechanical:	6 RU: 10.5" H x 19" W x 25" D		
Weight:	117 lbs in 32x32 Configuration		
Certifications:	FCC Part 15, CE, NRTL, TUV		

*All product designs and specifications subject to change without notice. See individual specification sheet for specific performance data.