

UHP-IFS

ACTIVE IF SPLITTER/COMBINER

COMBINER

SPLITTER

DC INJECTOR

The UHP-IFS is a L-Band 8-way active splitter and 4-way active combiner in a compact 1U mini-chassis. UHP-IFS is designed as an IF subsystem for UHP-based hubs and advanced terminals, but can be used in any other L-Band systems. There is DC and 10 MHz pass from two ports of the splitter to the common Rx port and similar connectivity of two ports of combiner to the common Tx port. Current flow is restricted in one direction, into the common port only. There is also a separate EXT DC port to facilitate BUC and LNB inject. Auxiliary DC MON ports allow measuring the actual voltage supplied to the RF equipment without having to disconnect the cables and disrupt the network.

Active UHP-IFS system provides the amplification of signals and allows them to share and summarize without loss. The UHP-IFS is powered from the voltage applied to power BUC or LNB. The presence of supply voltage is displayed by special indicator.

Universal mount allows installing the UHP-IFS system into front or rear side of a standard 19" telecommunication rack. It can be installed at any angle to prevent excessive bending of coaxial cables and simplifying maintenance compounds. UHP-IFS can be used to work with a variety of L-Band satellite equipment.




| PARAMETER | SPLITTER | COMBINER |
|-----------------------------|--|------------------------------------|
| Number of ports | 8 | 4 |
| Frequency Range | 950-2150 MHz | 950-1750 MHz |
| Loss | -2 ± 2 dB | 0 ± 3 dB |
| Frequency response | ± 2 dB | ± 3 dB |
| 1 dB Gain Compression Point | 2 dBm | 2 dBm |
| Isolation between ports | 14 dB | 13 dB |
| DC pass-through | up to 48VDC, 3A; ports Rx1 and Rx2 | up to 48VDC, 3A; ports Tx1 and Tx2 |
| 10 MHz pass-through | ports Rx1 and Rx2 | ports Tx1 and Tx2 |
| Power | 6-48 VDC via ports: Tx1, Tx2, Rx1, Rx2, Rx7, Rx8 or Ext DC; up to 3W | |
| Maximal DC load | up to 48VDC, 3A | up to 48VDC, 3A |
| Size / Weight | 487x44x56 mm; 1.5 kg | |
| Environmental | 0°...+50° C, humidity up to 90% | |

IFS CIRCUIT SWITCHING DIAGRAM FOR REDUNDANT UHP-240 ROUTER



IFS CIRCUIT SWITCHING DIAGRAM FOR HTS HUB CLUSTER

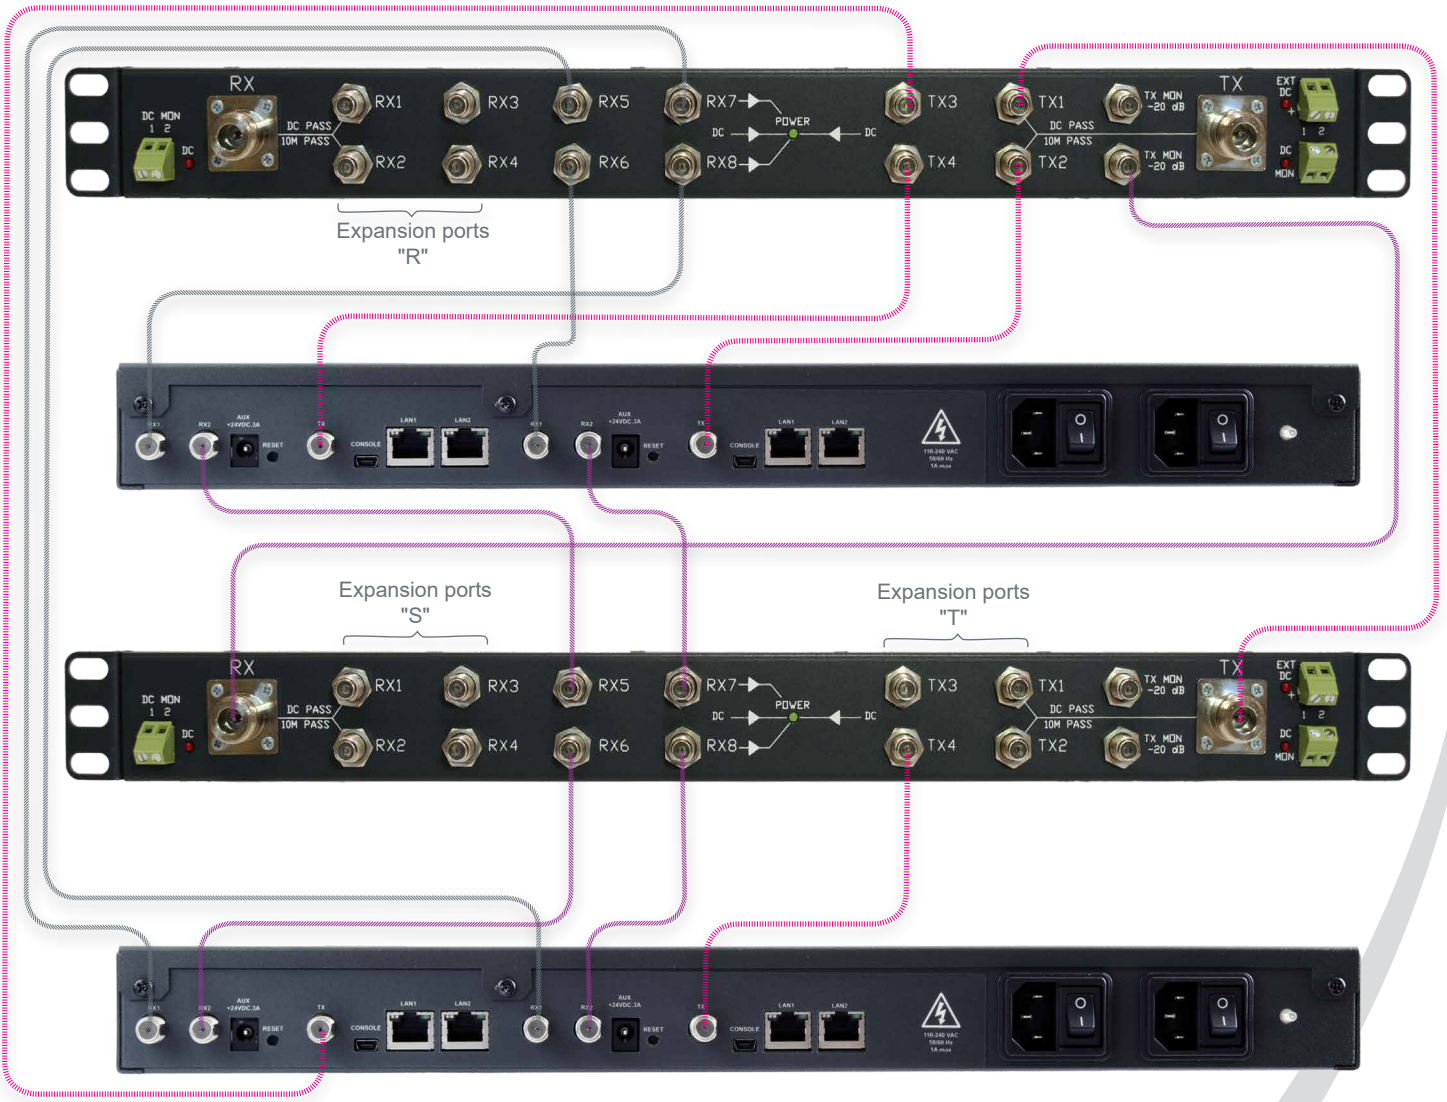

These specifications are subject to change without notice

* Available in a future SW release



UHP Networks Inc.
 6600 Trans-Canada Highway, Pointe-Claire (Montreal), Quebec, Canada H9R 4S2
 T: +1-514-695-VSAT (8728) | F: +1-514-697-0186 | www.uhp.net | info@uhp.net

