

# 25/50/75W Linear Ka-Band Antenna Mount High Power Amplifier



## FEATURES

- Variable Gain Control
- Complete RS-232/422/485 Interface
- Ethernet Interface
- Lightweight Package

The **XTLIN-25/50/75KaM** High Power Amplifiers are compact, fully integrated antenna mount units designed for low cost operation and longevity.

Intended for outdoor operation, these increase the amount of RF power reaching the feed. The construction and light weight allows for direct mount to the antenna. This eliminates long waveguide runs and associated RF losses.


Forced air cooling is implemented in the package to allow reliable operation over extended temperature ranges. The monitor and control (M&C) interface provides a component system status.




# PERFORMANCE SPECIFICATION

Parameters	XTLIN-25KaM	XTLIN-50KaM	XTLIN-75KaM
FREQUENCY RANGE, extended frequency coverage available		30.0 to 31.0 GHz	
Reference Input Impedance		50 Ohms	
LINEAR OUTPUT POWER	25W	50W	75W
GAIN			
Large Signal (minimum)		70 dB	
Attenuator Range (continuous)		30 dB $\pm$ 0.1 dB step size	
Maximum SSG Variation Over			
Any Narrow Band		0.80 dB maximum per 60 MHz	
Full Band		2.5 dB	
Slope (maximum)		$\pm$ 0.04 dB/MHz	
Stability, 24 hr. (maximum)		$\pm$ 0.25 dB	
Stability, Temperature (maximum)		$\pm$ 1.0 dB over temperature range at any frequency	
INTERMODULATION with two equal carriers @ linear power		-25 dBc relative to the sum of all carriers	
SPECTRAL REGROWTH, 1 SR offset @ linear power (maximum) (QPSK)		-30dBc	
HARMONIC OUTPUT (maximum)		-60 dBc	
AM/PM CONVERSION (maximum)		2.0 deg/dB at or below linear power	
NOISE POWER (maximum)			
Transmit Band		-70 dBW/4 kHz	
Receive Band		-150 dBW/4 kHz	
GROUP DELAY (maximum)			
Bandwidth		Any 60 MHz	
Linear		$\pm$ 0.01 nS/MHz	
Parabolic		$\pm$ 0.005 nS/MHz <sup>2</sup>	
Ripple		0.5 nS/Pk-Pk	
RESIDUAL AM NOISE (maximum)		-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz	
PHASE NOISE (maximum)		10 Hz	-42 dBc/Hz
		100 Hz	-72 dBc/Hz
		1 kHz	-82 dBc/Hz
		10 kHz	-102 dBc/Hz
		100 kHz	-112 dBc/Hz
		1 MHz	-122 dBc/Hz
		10 MHz	-122 dBc/Hz
		100 MHz	-122 dBc/Hz
VSWR			
Input (maximum)		1.3:1	
Output (maximum)		1.3:1	

# BLOCK DIAGRAM

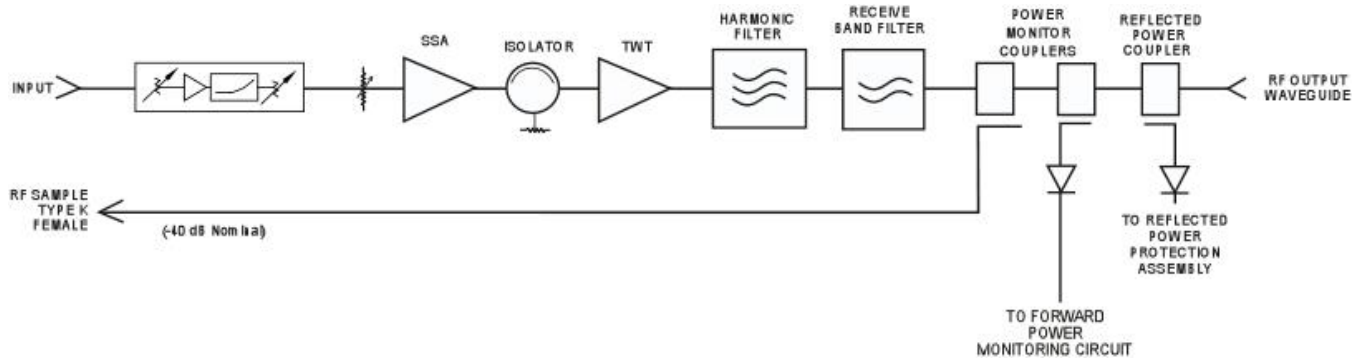

# OUTLINE DRAWING

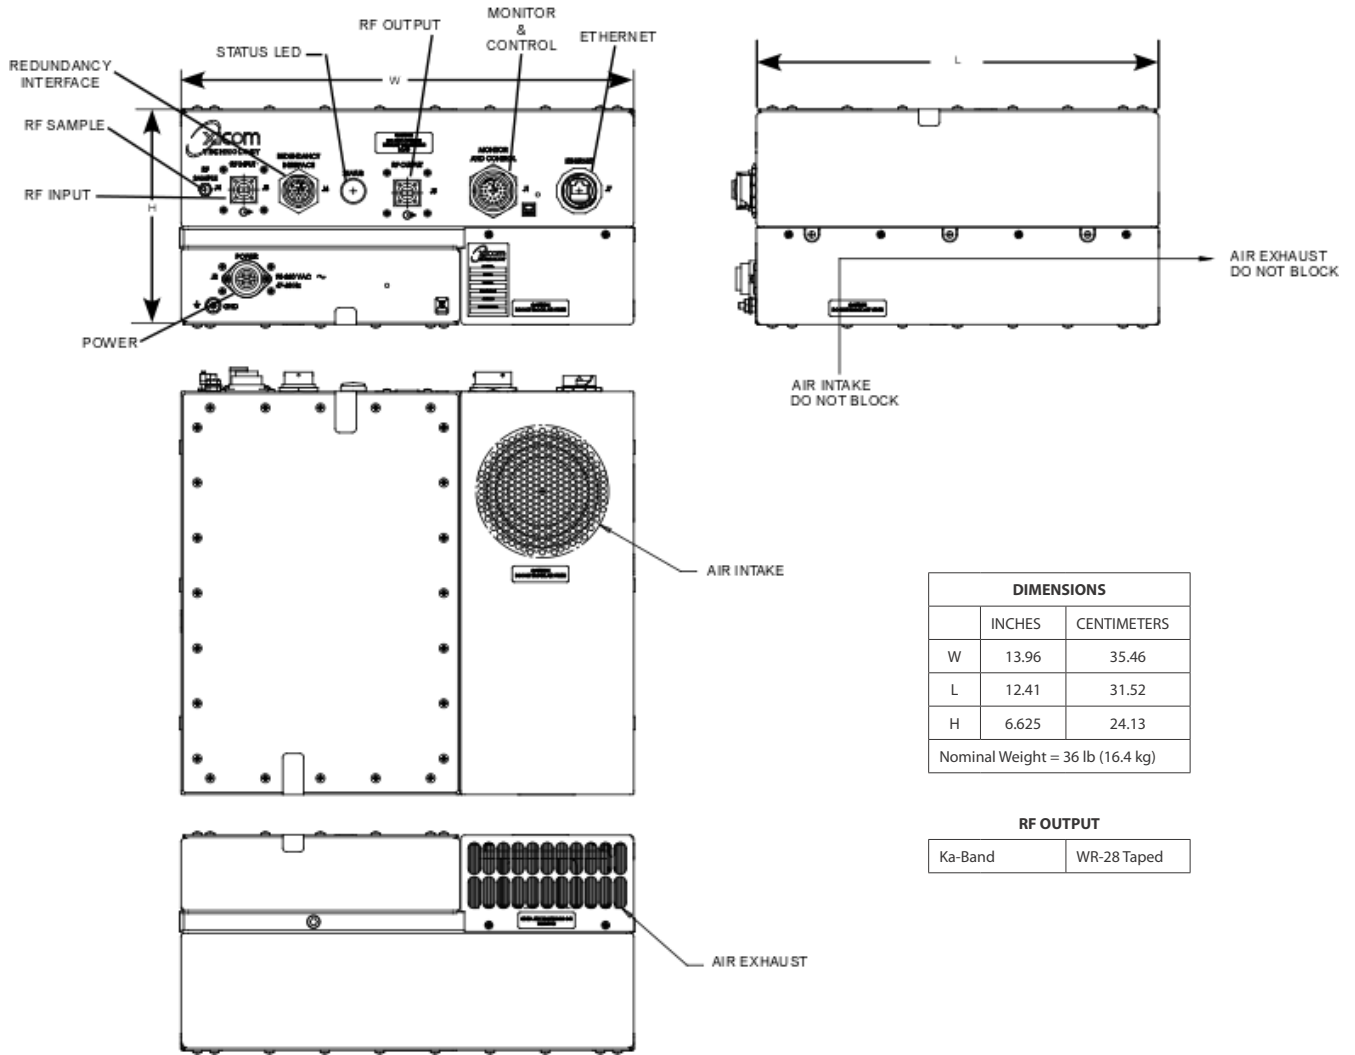

## PRIME POWER

90 to 264 VAC  
 47 to 63 Hz, Single Phase  
 400 VA Typical @ 90 VAC (25W Linear)  
 500 VA typical (50W & 75W Linear)  
 0.95 Minimum Prime Power Factor  
 0.98 Prime Power Factor Typical



## ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-54°C to +85°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C 2°C/1,000 ft. de-rating
HUMIDITY	Up to 100% Condensing
ALTITUDE	15,000 feet MSL maximum
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

## INTERFACE

Type	Function	
LOCAL CONTROL	Prime Power ON/OFF HV ON/OFF	Local/Remote
LOCAL STATUS	Tri-Color LED: Fault Red HV ON: Green	Standby: Continuous Amber FTD: Flashing Amber
REMOTE CONTROL	High Voltage ON/OFF Min/Max Power Alarm/Fault Reflected Power Alarm/Fault Heater Standby ON/OFF	Constant Power Gain Fault Reset Units (Watts, dBm, dBW)
REMOTE STATUS	HV ON RF Output Power Reflected Power Upconverter Fault Filament Time Delay	Heater/Beam Hours Fault Identification TWT Temperature Helix Current Helix Voltage
FORM C DRY CONTACT CLOSURE	Summary Fault (2X Form C Dry Contact Closure)	
COMPUTER SERIAL PORT	Hardware Interface - 2 Ports: RS-232 & RS-422/485	Xicom Command Set: ASCII Commands
RF SAMPLE PORT COUPLING	-40 dB Coupling Value (approx.)	

## OPTIONS

- Alternate Frequency Coverage
- Remote External Controller
- 1:1, 1:2, 1:N Redundancy
- Phase Combined

## Headquarters

Comtech Xicom Technology, Inc.  
 3550 Bassett Street  
 Santa Clara, CA 95054  
 USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: [sales@xicomtech.com](mailto:sales@xicomtech.com)

Web: [www.xicomtech.com](http://www.xicomtech.com)

## European Sales Office

Comtech Xicom Technology Europe, LTD  
 4 Portland Business Center  
 Manor House Lane  
 Datchet  
 Berkshire SL3 9EG  
 United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: [sales@xicomeurope.com](mailto:sales@xicomeurope.com)

Web: [www.xicomtech.com](http://www.xicomtech.com)

## Singapore Sales Office

Comtech Xicom Technology  
 150 Cecil Street  
 #08-02  
 Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: [asiasales@xicomtech.com](mailto:asiasales@xicomtech.com)

Web: [www.xicomtech.com](http://www.xicomtech.com)

