



**GeosSat**  
**Microwave**

- Dual bands are switchable
- Low power consumption
- Higher reliability from integrated design principle
- Compact size and light weight
- Meet ETSI, FCC standards



## Block Up-Converter DBS-Band 40W Extended (BUC)

Model: GB40DBS2N

Section	Item	Specification	
RF Specifications	RF Frequency	18.1-18.4 GHz	
	IF Frequency	1150-1450 MHz	
	External Reference		10 MHz, 0±5 dBm
			-140 dBc/Hz @100 Hz
			-150 dBc/Hz @1 KHz
			-155 dBc/Hz @10 KHz
	Saturated Output Power	≥ +46 dBm	
	Rated Output Power	+46 dBm	
	IMD3 @3dB back-off from Rated Output Power	-25 dBc	
	Small Signal Gain	70 dB	
	Gain Variation		0.25 dB p-p/ 1 MHz
			3 dB p-p/ 300 MHz
	Gain Stability		4 dB p-p/ 800 MHz
			±1.5 dB
Gain Adjustment Range		20 dB (Step: 0.1 dB)	
		-72 dBc/Hz @100 Hz	
Phase Noise		-82 dBc/Hz @1 KHz	
		-87 dBc/Hz @10 KHz	
		-92 dBc/Hz @100 KHz	
Output Spurious		-60 dBc	
	Power Supply	+36 to +72 VDC	
	Power Supply Draw @Rated Output Power	200 W	
Interface	RF Output Connector	WR62-G (Grooved)	
	RF Output VSWR	1.25:1	


Continued on the next page ▼

Section	Item	Specification
	IF Input Connector	N-Type Female
	IF Input VSWR	1.5:1
	Power Supply Connector	ACS02E10SL-4P
	Monitor and Control Connector	PT02E-12-14P, RS-485,RS-232 & Ethernet (Telnet)
	LED Indicators	LEDs off: BUC functioning properly Yellow LED on: PLL unlock alarm
Physical Parameters	Size	206*136*88 mm
	Weight	3.3 Kg
	Operating Temperature	-40 to +60 °C
	Humidity	0-100% (Condensing)
	Altitude	0-10000 F ASL

[www.geosatmicrowave.com](http://www.geosatmicrowave.com)

[sales@geosatmicrowave.com](mailto:sales@geosatmicrowave.com)

### Mechanical Diagram (Unit: inch (mm))

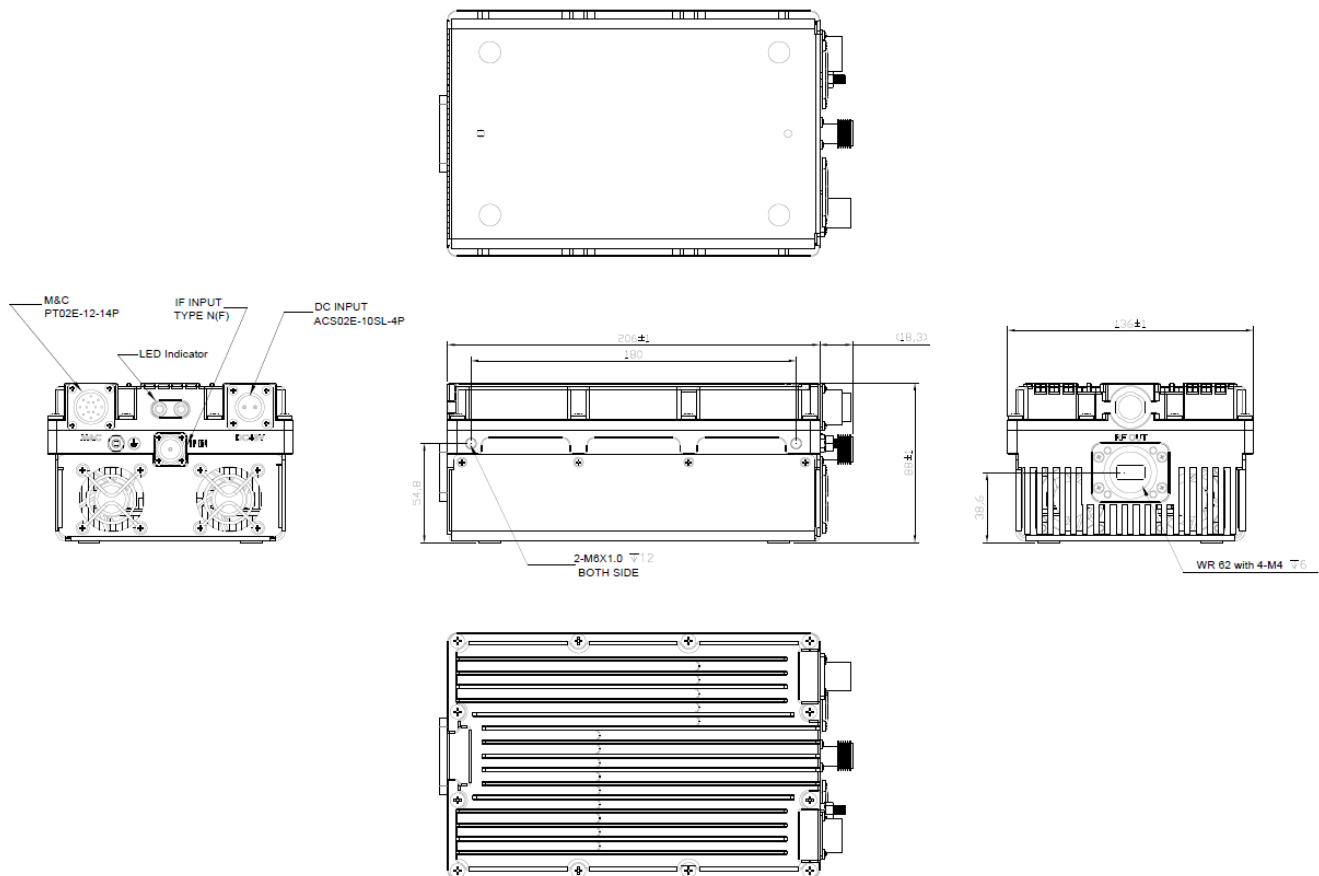

[www.geosatmicrowave.com](http://www.geosatmicrowave.com)

[sales@geosatmicrowave.com](mailto:sales@geosatmicrowave.com)