



GeosSat
Microwave

- Dual bands are switchable
- Low power consumption
- Higher reliability from integrated design principle
- Compact size and light weight
- Meet ETSI, FCC standards



Low Noise Block Ka-Band 5 LO PLL (LNB)

Model: GLKA5LON

Section	Item	Specification
Band 1	Input (GHz)	17.20 - 18.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	16.25 @13+/-1V
Band 2	Input (GHz)	18.20 - 19.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	17.25 @13+/-1V /22KHz
Band 3	Input (GHz)	19.20 - 20.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	18.25 @18+/-1V
Band 4	Input (GHz)	20.20 - 21.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	19.25 @18+/-1V /22KHz
Band 5	Input (GHz)	21.20 - 22.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	20.25 @22+/-1V
	Noise figure (@+25°C)	2.7 dB max. (with isolator)
	Input VSWR	1.5 : 1 max. (with isolator)
	Conversion gain	60 dB typ. (55dB min, 65dB max)
	Output VSWR	2.2 : 1 max.
	Gain flatness	4 dBp-p max. (each band)
	Gain ripple (@ 40MHz)	1.5 dBp-p max.
	1dB gain compression point	+10 dBm min.
	Output impedance	50, 75 ohms (option)
	Leakage (@ input port)	-60 dBm max.
	L.O stability (over temp.)	Depends on external reference


Continued on the next page ▼

Phase noise	Depends on external reference
Image rejection	40 dBc min. @L.O 16.25 GHz 25 dBc min. @L.O 17.25 GHz 0 dBc min. @L.O 18.25, 19.25, 20,25 GHz
Power supply	+12 to +24V DC
Required current	500 mA max.
Operating temperature	-40°C to +60°C
Storage temperature	-40°C to +80°C
Relative humidity	0% to 100% RH
Input waveguide flange	WR- 42 grooved
IF output connector	N-type, F-type female (option)
Weight	550 g

www.geosatmicrowave.com

sales@geosatmicrowave.com

Mechanical Diagram (Unit: inch (mm))

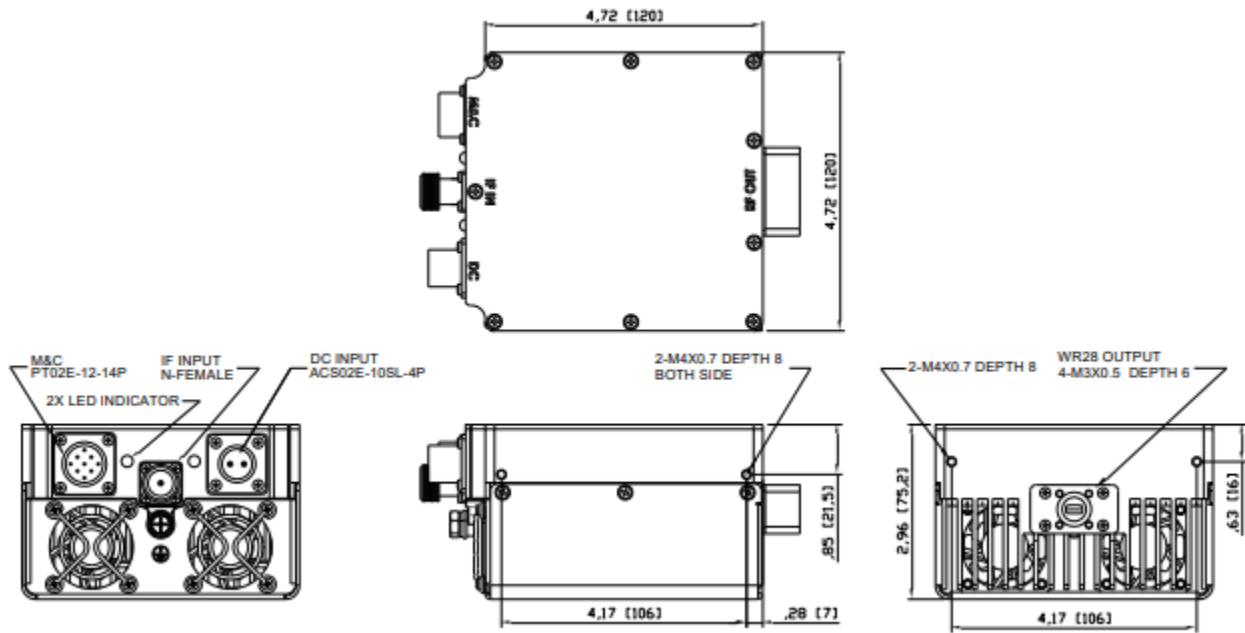

www.geosatmicrowave.com

sales@geosatmicrowave.com