

Used for Ku-(mid) band receive applications, this bandpass filter fully rejects the transmit band (above) and virtually all undesired transmissions (below) the receive band.

- Ideal for YAHSAT and other Ku-(mid)band Receive Applications
- Alternate Flange Configurations are Available Upon Request

Specifications:

Passband: 11.70 - 12.25 GHz Insertion Loss: 0.40 dB Approx

VSWR: 1.2:1 Typ


Rejection: 75 dB Min from 12.75 - 14.50 GHz
Flanges: WR75 Cover (In) / WR75 Grooved (Out)

Dimensions: 7.50" x 1.5" x 1.5"

(191mm x 38mm x 38mm)

Finish: Gloss White Lacquer



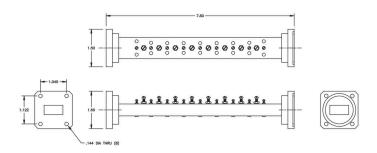

All MFC Products Designed and Manufactured in the USA



E-Mail: Sales@iktechcorp.com