



MFC

Microwave Filter Company, Inc.



Creating Filters and Components to 50 Ghz for Over 50 Years!

The model 19258 can be used for Earth-to-space transmit applications. This all-weather filter provides deep rejection of the receive band with minimal effect on the transmit band.

Specifications:

Passband Transmit:	2025 - 2120 MHz
Passband Insertion Loss:	0.8 dB Max
Passband VSWR:	1.44:1 Typ
Passband Flatness:	0.5 dB Max
Passband Power (CW):	200 Watts Max
Rejection:	50 dB Min @ 2200 MHz
Impedance:	50 ohms
Connectors:	N-female
Operating Temp. Range:	-30°C to +55°C

Weatherized for Indoor/Outdoor Use

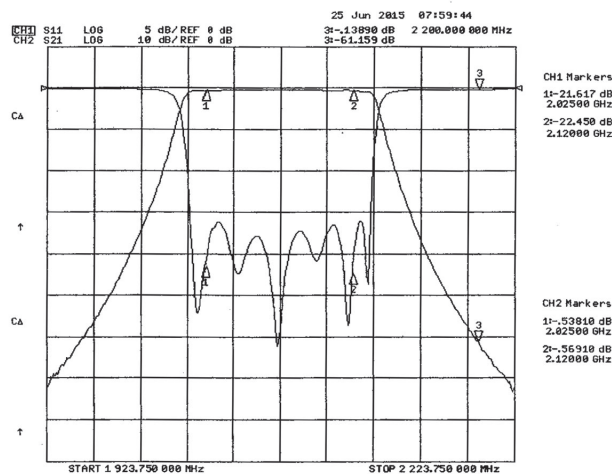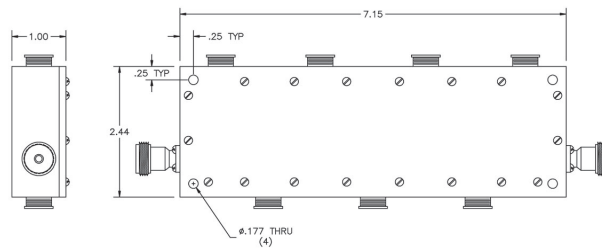

S-Band Transmit Bandpass Filter
Model 19258

All MFC Products Designed and Manufactured in the USA



E-Mail: Sales@iktechcorp.com